



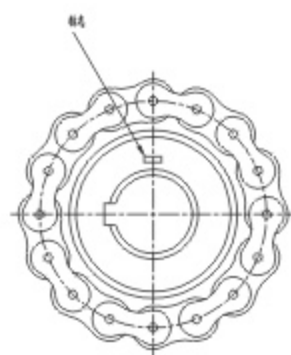

GL型滚子链联轴器 GB6069-85

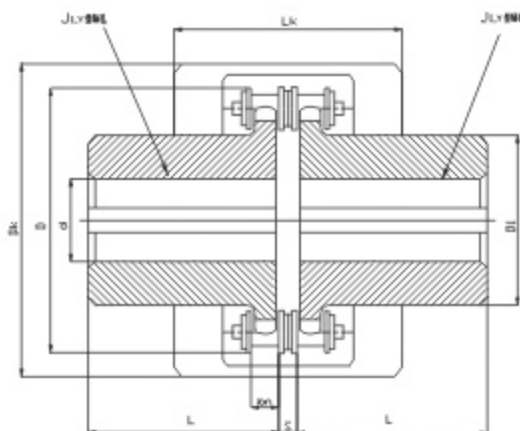

滚子链联轴器罩壳KC链条联轴器罩壳KC联轴器罩壳;联轴器保护罩壳;滚子链联轴器罩壳GL罩壳 滚子链联轴器结构简单, 安装方便, 反转时有空行程, 不宜用于冲击载荷特别大的场合, 有带保护壳的型号, 主要用于高转速和潮湿环境场合, 应用范围极其广泛。

GL型联轴器主要参数与尺寸

mm

型号	公称 转矩 Tn N·m	许用转速 [n] r/min		轴孔直径 d	轴孔长度		链 号	尺 寸					重量 kg
		Y型	J ₁ 型		D	bn		S	D ₁	罩壳 Dk×Lk max			
		L	L ₁										
GL1	40	1400	4500	16~20	42~52	38	TG95×2	51.06	5.3	4.9	35	70×70	0.5
GL2	63	1250	4500	19~24	42~52	38	TG95×2	57.08	5.3	4.9	38	75×75	0.8
GL3	100	1000	4000	20~25	52~62	38~44	TG127×2	68.88	7.2	6.7	40	85×80	1.2
GL4	160	1000	4000	24~32	52~82	44~60	TG127×2	79.61	7.2	6.7	50	95×88	2
GL5	250	800	3150	28~40	62~112	60~84	TG158×2	94.46	8.9	9.2	60	L12×100	3.5
GL6	400	630	2500	32~50	82~112	60~84	TG158×2	116.57	8.9	9.2	70	140×105	5
GL7	630	630	2500	40~60	112~142	84~107	TG190×2	127.78	11.9	10.9	85	150×122	8
GL8	1000	500	2240	45~70	112~142	84~107	TG254×2	154.33	15	14.3	110	180×135	12
GL9	1600	400	2000	50~80	112~172	84~132	TG254×2	186.5	15	14.3	120	215×145	20
GL10	2500	315	1600	65~90	142~172	107~132	TG317×2	213.02	18	17.8	140	245×165	27
GL11	4000	250	1500	75~100	142~212	107~167	TG381×2	231.49	24	21.5	160	270×195	40
GL12	6300	250	1250	85~120	172~212	132~167	TG444×2	270.08	24	24.9	170	310×205	60
GL13	10000	200	1120	100~140	212~252	167~202	TG508×2	340.8	30	28.6	200	380×230	88
GL14	16000	200	1000	120~160	212~302	167~242	TG508×2	405.22	30	28.6	220	450×250	152
GL15	25000	200	900	140~190	252~352	202~282	TG635×2	466.25	36	35.6	280	510×285	235