




LA冶金设备用轮胎式联轴器 JB/ZQ4018-85



本联轴器是一种高弹性联轴器，具有良好的减震缓冲和优越的轴间偏移补偿性能。

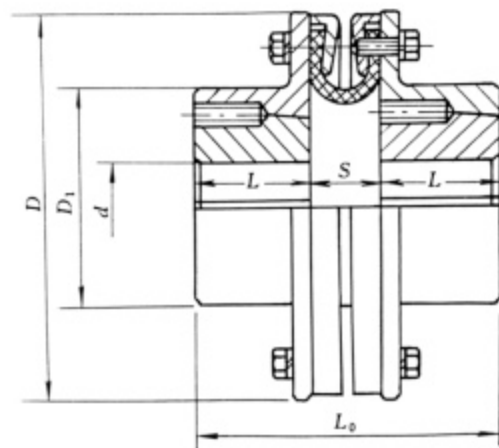

LA型凹形胎式联轴器基本参数及主要尺寸

mm

型 号	公称转矩 T_n /N.m	许用转速 [n] /r.min ⁻¹	轴孔直径 d		轴孔长度 L	D	D ₁	L ₂	S	质量 m /kg
			min	max						
LA1	63	5000	12	40	27	138	86	80	26	4.08
LA2	80		12	42	31	150	94	88	27	4.99
LA3	125		12	50	33	172	113	95	28	6.8
LA4	200	4500	16	65	46	192	125	127	35	10.9
LA5	315	4000	16	70	48	219	144	137	38	15.9
LA6	450	3600	24	80	54	242	152	149	41	20.9
LA7	630	3000	24	85	62	276	178	168	44	28.1
LA8	1000	2800	24	95	66	310	210	187	54	44.5
LA9	1600	2400	28	130	90	357	251	245	64	76.2
LA10	2500	2200	38	150	104	393	251	285	76	89.8
LA11	3550	2000	38	160	116	430	254	322	90	102
LA12	5600	1850	38	170	116	471	267	337	102	120
LA13	8000	1600	45	190	142	510	272	401	117	151
LA14	12500	1500	48	200	152	576	284	432	127	211
LA15	16000	1400	50	200	162	617	300	471	146	255