


LB冶金设备用轮胎式联轴器 JB/ZQ4018-85

本联轴器是一种高弹性联轴器，具有良好的减震缓冲和轴间偏差优越的补偿性能。

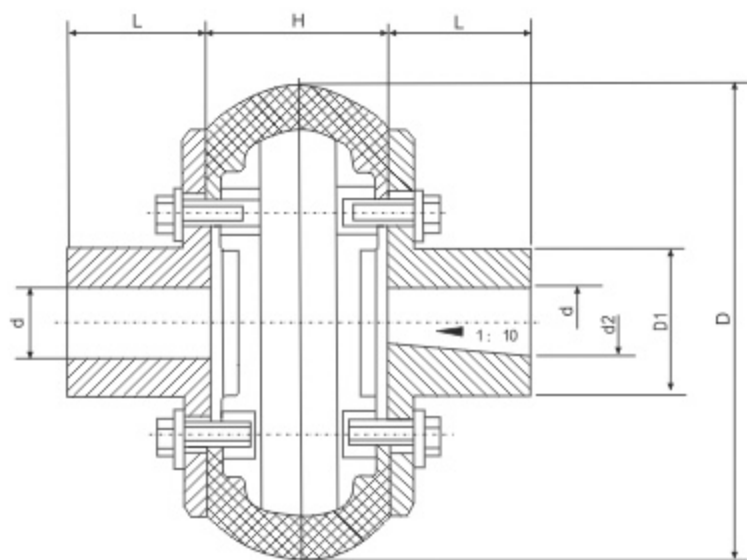

LB型轮胎式联轴器基本性能参数和主要尺寸 mm

规格	主要尺寸			螺钉—数目 Md x L	许用轴孔 d d _e	轴孔长度 L	公称转矩 T _n	许用转速 [N]	转动惯量 kg.m ²	重量 kg
	D	D _i	H							
LB1	60	20	26	12-M4 x 12	6~11	16~25	10	5000	0.0003	0.4
LB2	100	36	32/37	12-M6 x 18	10~19	25~42	50	5000	0.0035	1.5
LB3	120	44	39	12-M8 x 20	16~24	30~52	100	4500	0.01	2.2
LB4	140	50	45	12-M10 x 20	22~35	38~82	160	4200	0.021	3.1
LB5	160	60	51	12-M10 x 22	25~38	44~82	224	4000	0.031	5
LB6	185	70	58	12-M12x 25	30~45	60~112	315	3600	0.07	8.1
LB7	220	85	68	12-M12 x 28	35~50	60~112	500	3200	0.15	13
LB8	265	110	82	12-M12 x 32	40~56	84~142	800	2600	0.30	22
LB9	310	120	106	12-M16 x 40	45~71	84~142	1250	2200	0.75	35
"	340	135	106	12-M16 x 45	55~75	84~142	1600	2000	1.1	51
LB10	400	150	124	12-M20x 50	60~85	107~172	2250	1800	2.2	69
LB11	445	190	140	12-M20x 56	80~120	132~212	5000	1600	4.4	110
LB12	550	238	172	16-M24 x 71	100~150	167~252	10000	1200	14	190
LB13	700	318	220	24-M24x 71	130~200	202~352	20000	1000	38	340